


Printer Settings

Fargo (half panel)



Close




Smart Identity Pro

and



Adobe Reader

before applying printer settings


Open *Devices and Printers* or *Printer and Scanners* based on your Windows version

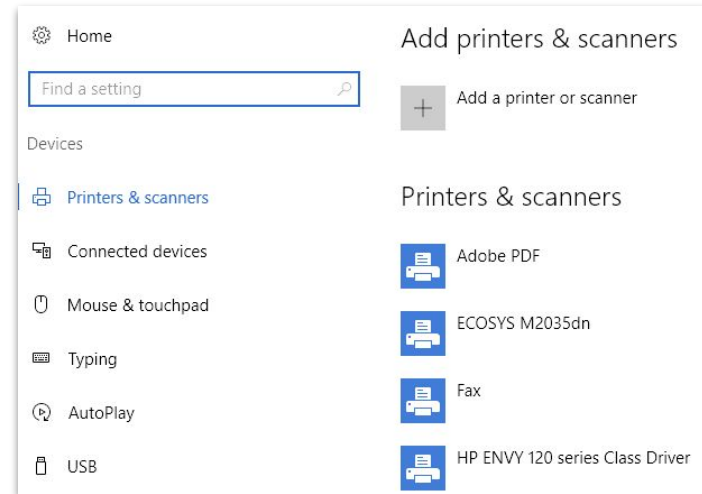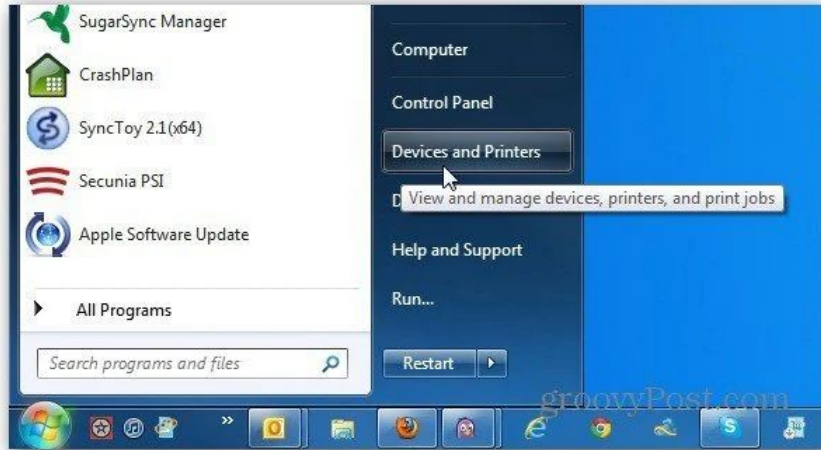

Right click on printer icon to select *Printing Preferences*

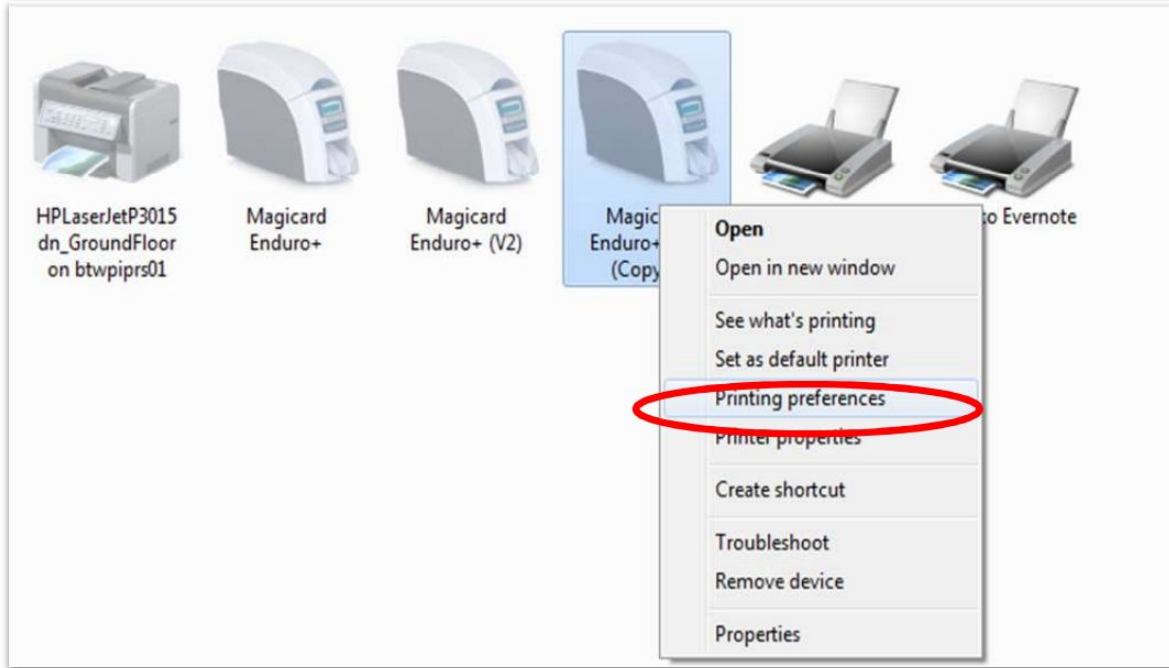

Printer Preferences (match as shown)



DTC1000 Card Printer Printing Preferences

Magnetic Encoding | Overlay / Print Area | K Panel Resin | Printer Info

Card | Device Options | Image Color | Image Calibrate

Card Size

CR-80

inches mm

Print Width: 2.110

Print Length: 3.366

Card Thickness (mil): 30

Orientation

Portrait Landscape

Copies: 1

Diagnostics Test Print

ToolBox About

OK Cancel Apply Help

DTC1000 Card Printer Printing Preferences

Magnetic Encoding | Overlay / Print Area | K Panel Resin | Printer Info

Card | Device Options | Image Color | Image Calibrate

Supplies

Automatically detect the installed Ribbon for every print job.

Ribbon Type: YMCKOK - Full Color/2 Resin Black/Overlay - Half Panel

Dual Sided

Print Both Sides

Split 1 Set of Ribbon Panels

Print Back Image on Front of Card

Print Back Side Only

Options

Rotate Front 180 Degrees

Rotate Back 180 Degrees




Disable Printing

Write Only



Invert F-panel Image

OK Cancel Apply Help



Printer Preferences (match as shown)

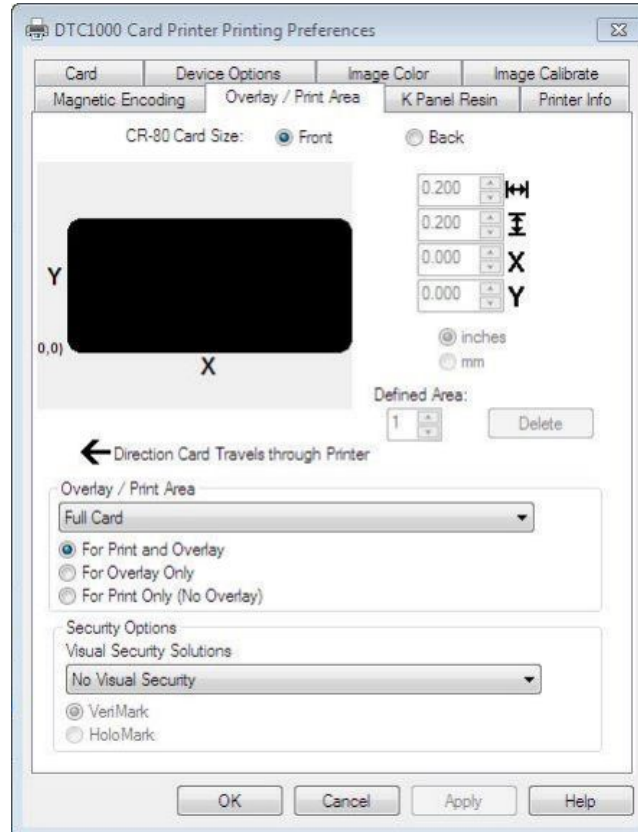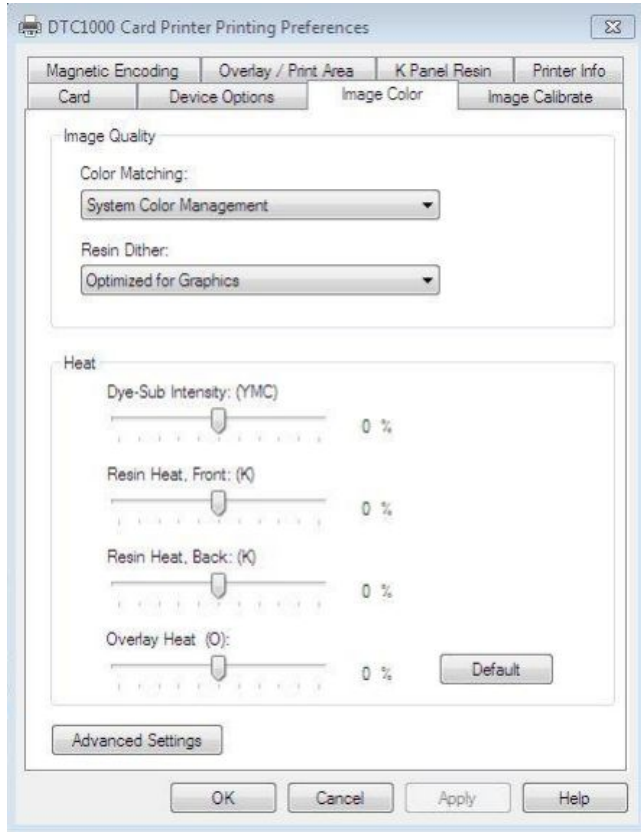



Printer Preferences (*match as shown*)

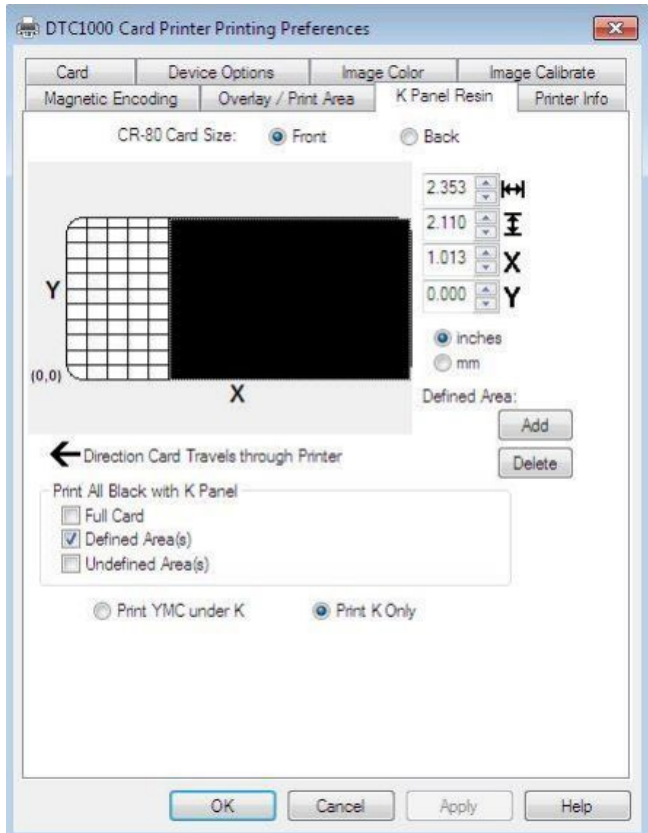


Open **Smart Identity Pro** -> **Print** -> **Advanced**

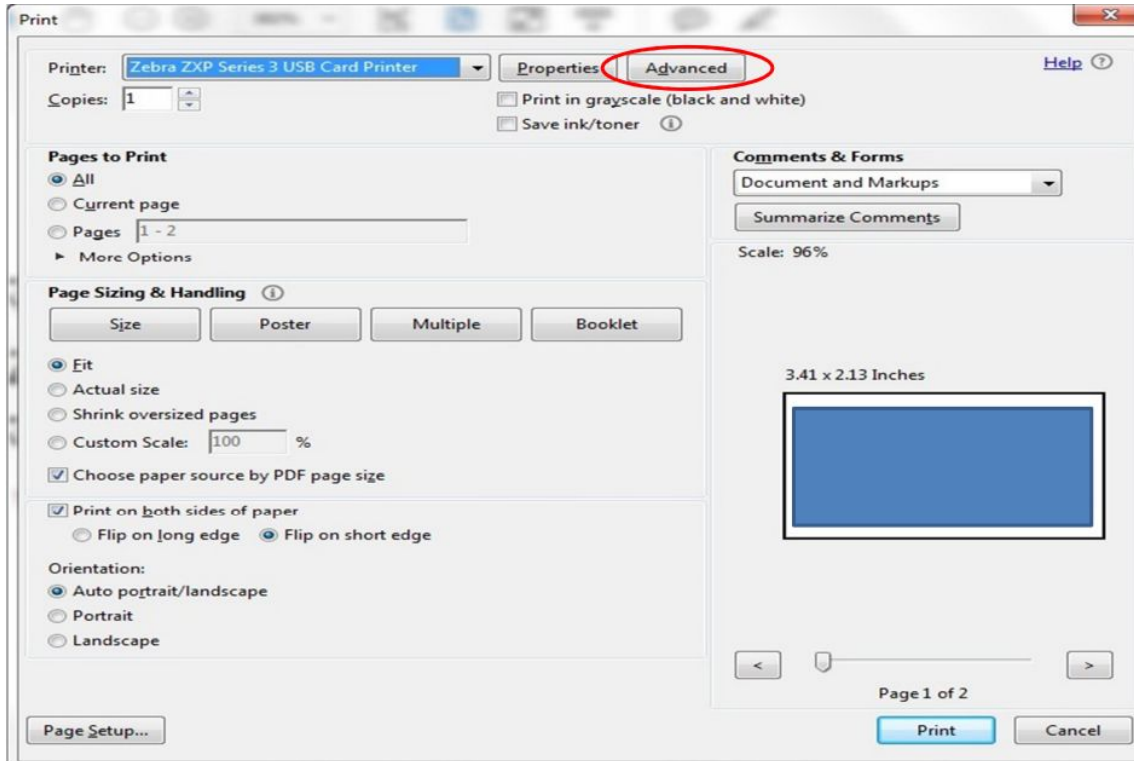

Select *Let printer determine colors*

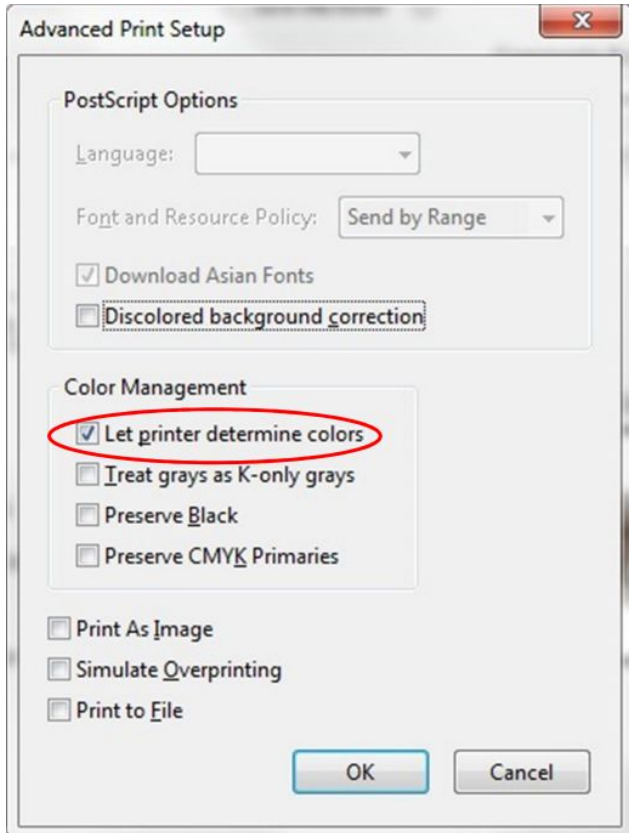



Open any file and ***Print***

Happy Printing!